



Machakos University College
(A Constituent College of Kenyatta University)
University Examinations 2014

SCHOOL OF ENGINEERING AND TECHNOLOGY
DEPARTMENT OF BUILDING AND CIVIL ENGINEERING
Examination for:

DIPLOMA IN BUILDING TECHNOLOGY
DIPLOMA IN CIVIL ENGINEERING

STRUCTURES III

2705/303

2707/303

Date:../07/2014

Time: 8:30-11:30am

Instructions to Candidates

Answer any **FIVE** of the following **EIGHT** questions

All questions carry equal marks

Candidates to have relevant design manuals

1.

- a) State **Six** assumptions that are made in the design of riveted joints (6 marks)
- b) A single riveted lap joint connects two plates of 15mm thickness (6 marks)
- i. Design the lap joint
- ii. Determine the efficiency of the joint (14 marks)
- Take: Shear stress = 80N/mm^2 , bearing stress = 150N/mm^2 , tearing stress = 100N/mm^2

2.

- a) Explain **Four** modes of failure that occur in riveted joints (8 marks)
- b) A double riveted double cover butt joint is provided with 12mm thick cover plates, 15mm thick main plate and 20mm nominal diameter rivets as shown in figure 1. Determine: (12 marks)
- i. The safe load that the connection can carry
- ii. The efficiency of the joint
- Take: Shear stress = 70N/mm^2 , bearing stress = 180N/mm^2 , tearing stress = 90N/mm^2

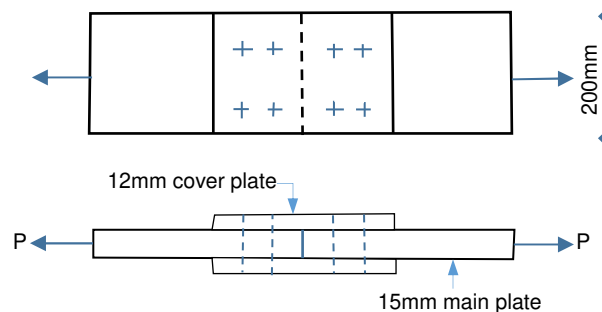


Figure 1

3. A timber beam of overall span 3.0m supports a uniformly distributed design load of 10kN/m inclusive of self-weight. The ends of the beam are held in position and the compression edge is held in line. Select a suitable section for the beam using timber of strength class C16. Check for bending, deflection, lateral buckling and bearing. $K_3=1.00$, $K_7=1.02$, $l_b=200\text{mm}$ (20marks)

